(51) International Patent Classification[7]:        G06F 17/30

(21) International Application Number:
PCT/NO2004/000383

(22) International Filing Date:
10 December 2004 (10.12.2004)

(25) Filing Language:        Norwegian

(26) Publication Language:        English

(30) Priority Data:
20035503        10 December 2003 (10.12.2003)        NO

(71) Applicant and
(72) Inventor: SELJESETH, Kurt [NO/NO]; Huldreveien 65,
N-1388 Borgen (NO).

(74) Agent: BRYN AARFLOT AS; P.O. Box 449 Sentrum,
N-0104 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
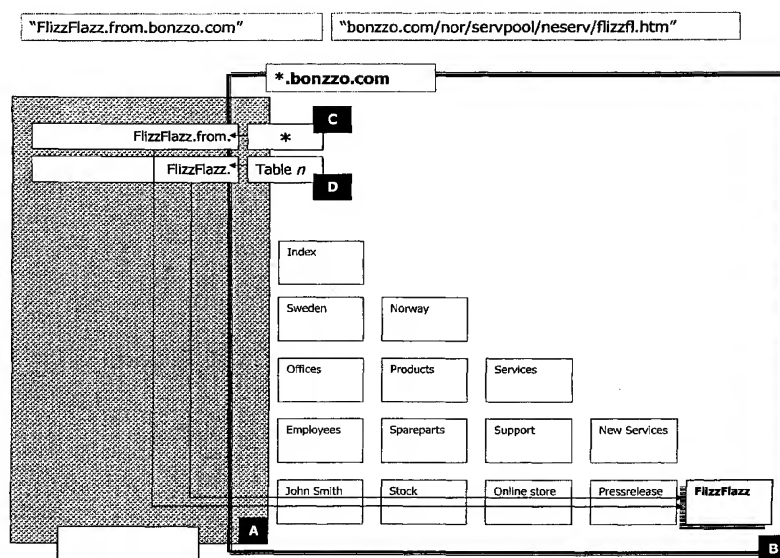kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
—        with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: INTENTIONAL ADDRESSING AND RESOURCE QUERY IN A DATA NETWORK



(57) Abstract: In a method and a system for arriving quickly at desired resources in a data network, a user states a ressource query in rich language in a first line user interface attached to the data network. At least one layer for dynamic communication and handling, implemented at a network context operator, then processes the ressource query and uncovers the intention of the user, through processing in accordance with for instance user specific information and special handling algorithms. Thereafter, the layer establishes a connection to the specific address of the ressource in question.